



DATE: 20/03/2018

MODEL: ALL

FIRE EXTINGUISHER NOZZLE BRACKET***PRIORITY – HIGH (ACTION)***

In line with extinguisher manufacturer recommendations and homologations, fire extinguisher nozzles in the engine bay must be rigidly mounted at the nozzle.

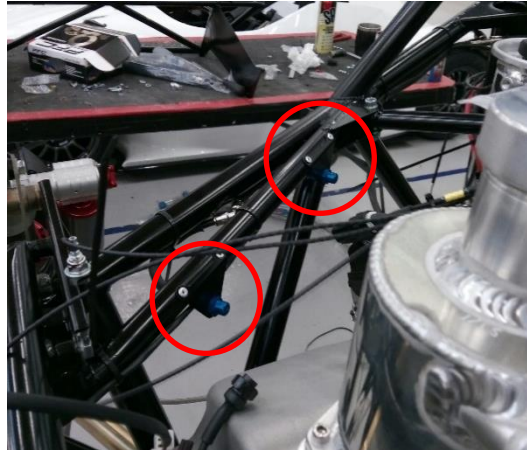


Figure 1 – Nozzle Mounting

In order to facilitate this on existing cars, Radical has designed a securing bracket that can be riveted into the chassis as shown in the above photo.

If required from the factory, the part number for the bracket is AF0040. To secure this, two 4mm rivets are required per bracket, with 4 brackets needed per car. Additionally, 4 nuts may be required that fit on the back of the nozzle, part number AF0042.

The production fitment for these brackets will be 2" in from the ends of the tube.

For parts supply please contact: stores@radicalsportscars.com

Technical Department
Radical Sportscars

Mobile: +44 (0)7876 146854
Tel: +44 (0)1733 331616 ext. 263
Email: technical@radicalsportscars.com

**RADICAL**